# PRODUCT **NEWS**

# wentronic

05/2024




26/04/2024



# CAT 6 & CAT 6A Unshielded RJ45 Connector for Field Assembly

for 5.0-8.5 mm cable diameter, with screw cap, tool-free IDC mounting

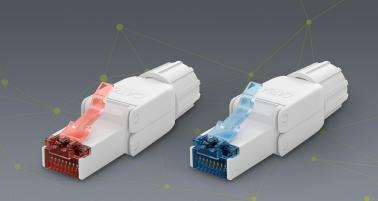



#### Features

Network connector for field assembly, suitable for round cables with solid conductors (AWG 22/1 - 24/1) and stranded conductors (AWG 22/7 - 24/7)

For quick, tool-free assembly on network cables by simply pressing the connector housing together and screwing on the strain relief

The CAT connector supports Power over Ethernet (PoE++, 4PPoE, Ultra PoE) according to IEEE802.3bt as well as 10GBase-T (downward compatible)

The RJ45 connector is suitable for terminating a CAT installation cable to create a custom-sized network cable (cable routing: 180°)

 $3\mathchar`-\mu m$  gold-plated contacts ensure durability and a perfect signal transmission

The RJ45 connector is TIA-568A/B colour-coded




Availability	Specification	ltem no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight	
• exp. from WEEK 20	CAT 6	65942	4040849659423	4.99€	1000	1	7.00 cm	10.00 cm	1.60 cm	0.010 kg	Bulk
• exp. from WEEK 20	CAT 6A	65941	4040849659416	5.99€	1000	1	7.00 cm	10.00 cm	1.60 cm	0.010 kg	Bulk

Wentronic GmbH Pillmannstraße 12, 38112 Braunschweig (Germany) | Tel/Fax: +49 (0)531-21058-0 /-22 | www.wentronic.com Product and packaging images may vary. Errors and omissions excepted..



# CAT 6 & CAT 6A STP-Shielded RJ45 Connector for Field Assembly

for 5.0-8.5 mm cable diameter, with screw cap, tool-free IDC mounting

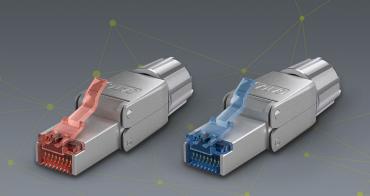





#### **Features**

Network connector for field assembly, suitable for round cables with solid conductors (AWG 22/1 - 24/1) and stranded conductors (AWG 22/7 - 24/7)

For quick, tool-free assembly on network cables by simply pressing the connector housing together and screwing on the strain relief

The CAT connector supports Power over Ethernet (PoE++, 4PPoE, Ultra PoE) according to IEEE802.3bt as well as 10GBase-T (downward compatible)

The RJ45 connector is suitable for terminating a CAT installation cable to create a custom-sized network cable (cable routing: 180°)

 $3\mathchar`-\mu m$  gold-plated contacts and the STP screen ensure durability and a perfect signal transmission

The RJ45 connector is TIA-568A/B colour-coded

Availability	Specification	ltem no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight	
• exp. from WEEK 20	CAT 6	65940	4040849659409	7.99€	500	1	6.00 cm	11.00 cm	1.60 cm	0.011 kg	Bulk
• exp. from WEEK 20	CAT 6A	65939	4040849659393	8.99€	500	1	6.00 cm	11.00 cm	1.60 cm	0.011 kg	Bulk

Wentronic GmbH Pillmannstraße 12, 38112 Braunschweig (Germany) | Tel/Fax: +49 (0)531-21058-0 /-22 | www.wentronic.com Product and packaging images may vary. Errors and omissions excepted.



# Outdoor Extension Cable

safety plug (type F, CEE 7/7) > 2x safety socket (type F, CEE 7/3)







#### **Features**

Extension cable for powering household appliances indoors and outdoors as well as for equipping cable drums

Handy solution to extend a single socket to two connections

Splash-proof according to protection class IP44, suitable for damp rooms and temporary outdoor use, e.g. as power cable for a lawn mower

Self-closing lids covering the sockets provide special protection against dirt and moisture

Light-duty rubber sheath cable with high flexibility even at low temperatures, suitable for light mechanical strain

Oil, heat and cold resistant, outer diameter approx. 9.5 mm

Plugs tested by VDE and TÜV Rheinland, max. load 3680 W at 230 V (AC) and 16 A



Availability	Length	ltem no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight	
• exp. from WEEK 28	5.00 m	65434	4040849654343	19.99€	10	1	20.50 cm	20.50 cm	5.00 cm	1.100 kg	Sleeve
• exp. from WEEK 28	10.00 m	65435	4040849654350	34.99€	8	1	25.00 cm	25.00 cm	5.00 cm	1.500 kg	Sleeve
• exp. from WEEK 28	25.00 m	65436	4040849654367	49.99€	4	1	28.50 cm	28.50 cm	8.00 cm	3.000 kg	Sleeve


Wentronic GmbH Pillmannstraße 12, 38112 Braunschweig (Germany) | Tel/Fax: +49 (0)531-21058-0 /-22 | www.wentronic.com Product and packaging images may vary. Errors and omissions excepted..



# Outdoor Extension Cable

safety plug (type F, CEE 7/7) > 3x safety socket (type F, CEE 7/3)



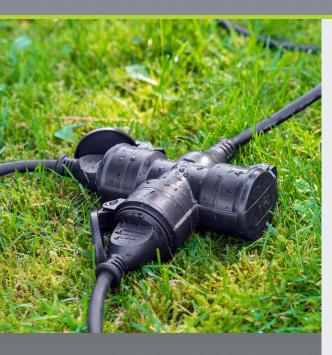



#### **Features**

Extension cable for powering household appliances indoors and outdoors as well as for equipping cable drums

Handy solution to extend a single socket to three connections

Splash-proof according to protection class IP44, suitable for damp rooms and temporary outdoor use, e.g. as power cable for a lawn mower

Self-closing lids covering the sockets provide special protection against dirt and moisture

Light-duty rubber sheath cable with high flexibility even at low temperatures, suitable for light mechanical strain

Oil, heat and cold resistant, outer diameter approx. 9.5 mm

Plugs tested by VDE and TÜV Rheinland, max. load 3680 W at 230 V (AC) and 16 A



							~	-			
Availability	Length	ltem no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight	
• exp. from WEEK 28	5.00 m	65437	4040849654374	24.99€	10	1	20.50 cm	20.50 cm	5.00 cm	1.100 kg	Sleeve
• exp. from WEEK 28	10.00 m	65438	4040849654381	39.99€	8	1	25.00 cm	25.00 cm	5.00 cm	1.500 kg	Sleeve
• exp. from WEEK 28	25.00 m	65439	4040849654398	54.99€	4	1	28.50 cm	28.50 cm	8.00 cm	3.000 kg	Sleeve


Wentronic GmbH Pillmannstraße 12, 38112 Braunschweig (Germany) | Tel/Fax: +49 (0)531-21058-0 /-22 | www.wentronic.com Product and packaging images may vary. Errors and omissions excepted..



# Universal Power Supply 3 V - 12 V, Max. 3.6 W

incl. 11 adapters: 7 DC adapters plus USB-C™, USB-A, USB Mini-B, Micro-USB and a screw terminal connection



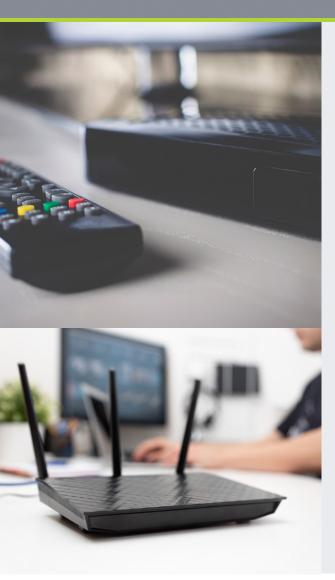

#### **Features**

Power supply with variable voltage, perfect as a replacement unit for electronic devices such as TV box, router, LED strips, video camera, digital picture frame, dartboard, baby monitor or toy

The output voltage can be regulated via the enclosed rotary key for selecting 3 V/4.5 V/5 V/6 V/7.5 V/9 V/12 V at 0.3 A

The USB-C<sup>™</sup> adapter serves a wide range of new devices and, as a new hardware standard, makes the switching power supply a viable, long-term option

Micro-USB and Mini-USB power many small devices such as portable radios, battery chargers, Bluetooth speakers or headphones

Incl. permanently attached DC plug 5.5 x 2.1 mm and 6 additional DC adapters: 5.5 x 2.5 mm, 2.5 x 0.7 mm, 3.0 x 1.1 mm, 3.5 x 1.35 mm, 4.0 x 1.7 mm, 4.8 x 1.7 mm

With the interchangeable DC adapters, the 12 V power supply unit with Europlug (CEE 7/16) eliminates the need to purchase additional chargers

Fuses in the plug-in power supply protect the device against short circuits, overload, overvoltage and overcurrent

										9 <b>0</b> my
Availability	ltem no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight	
• available	65592	4040849655920	11.99€	40	1	11.30 cm	8.70 cm	5.80 cm	0.205 kg	Retail Box

Wentronic GmbH Pillmannstraße 12, 38112 Braunschweig (Germany) | Tel/Fax: +49 (0)531-21058-0 /-22 | www.wentronic.com Product and packaging images may vary. Errors and omissions excepted..